

## 65 13 050 Removing and installing/replacing speaker (tweeter, front door)




*Necessary preliminary tasks:*

- Remove [front door trim](#)
- Detach cover on door window frame in front area.

*Note:*

For purposes of clarity, illustration shows cover removed on door window frame.

Remove foam wedge (1) from cover on door window frame (2).

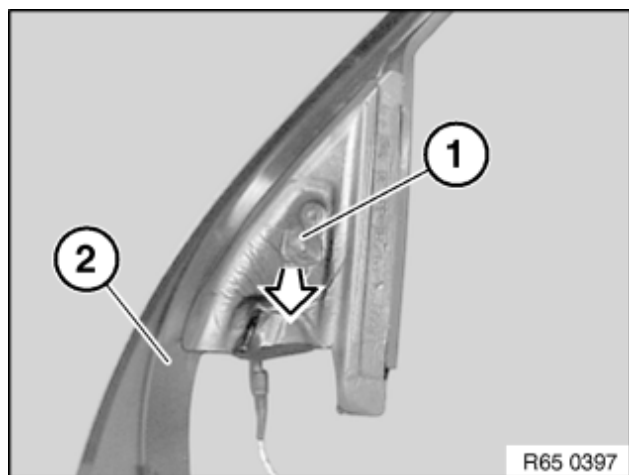

Unlock catches (1) and remove speaker (2) from cover on door window frame (3).

