
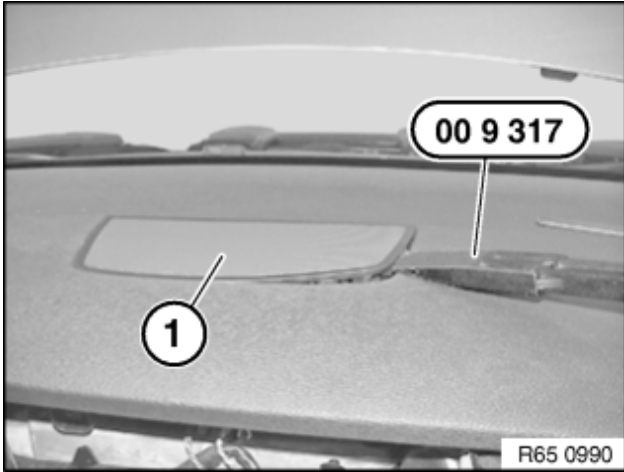



65 13 065 Removing and installing/replacing front speaker carrier (instrument panel)

Special tools required:

- [00 9 317](#)



Unclip trim (1) with special tool [00 9 317](#) from catches.


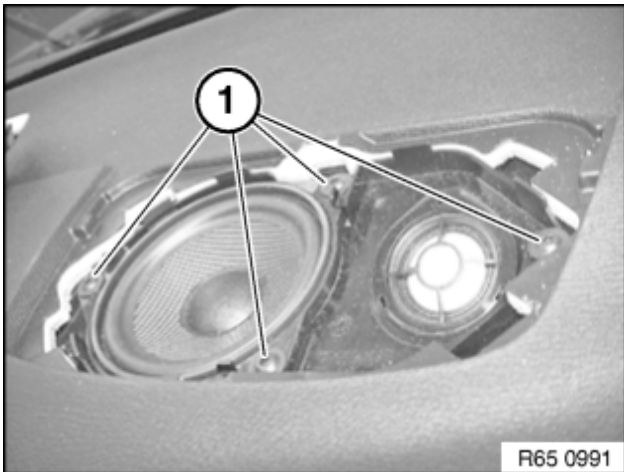


Disconnect plug connection (1).

Remove speaker carrier and disconnect associated plug connection.

Installation:

Retaining lugs (1) must not be damaged

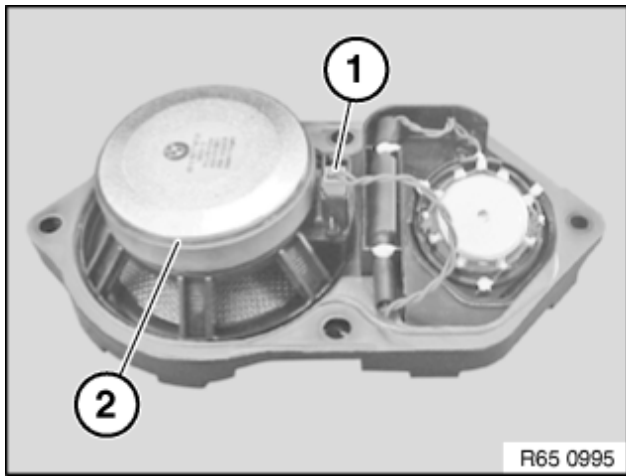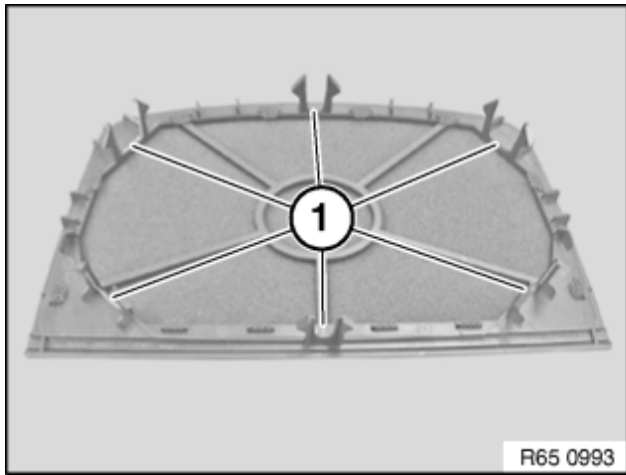**Replacement:**

Disconnect plug connection (1) and feed out speaker (2).