


### 51 43 Removing and 259 installing/replacing trim for rear roof pillar (D- pillar), left or right

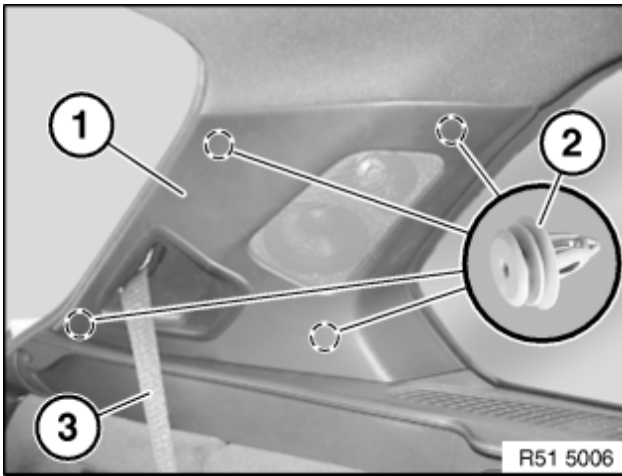


Release trim (1) inwards from clips (2) and remove.

Complete removal only with version with 3rd seat row:

Release screw for seat belt (3).

Feed seat belt (3) out of trim (1).

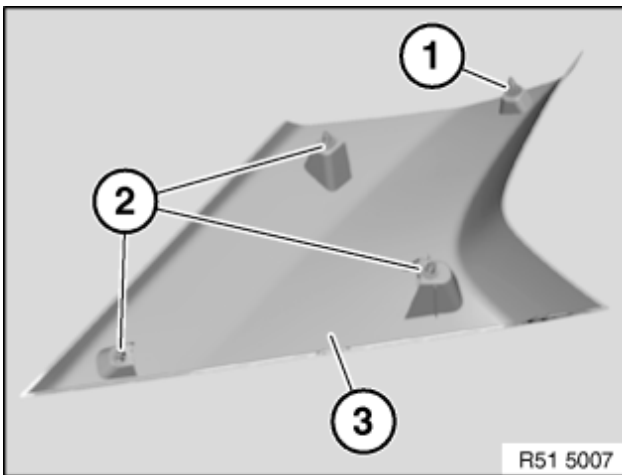

*Installation:*

If necessary, replace faulty clips (1 and 2).

Make sure all clips are installed in correct position.

- (1) Blue clip
- (2) White clip