



Femco

STANDARD

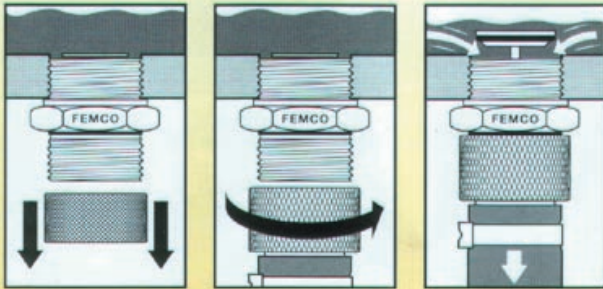

- The **FEMCO STANDARD SYSTEM** can be used in most equipment. Simply replace the factory fitted plug. No special tools needed.
- Remove the dustcap, which keeps the threads clean.
- Thread the drainer onto the drain plug to activate the system.
- Hot oil drains quickly and safely by **GRAVITY OR SUCTION**.
- Remove the drainer, replace the dustcap.
- Full range of sizes and thread patterns: UNF, UNC, UNS, BSW, Metric, BSP, NPT etc. Custom sizes available.

COMPACT

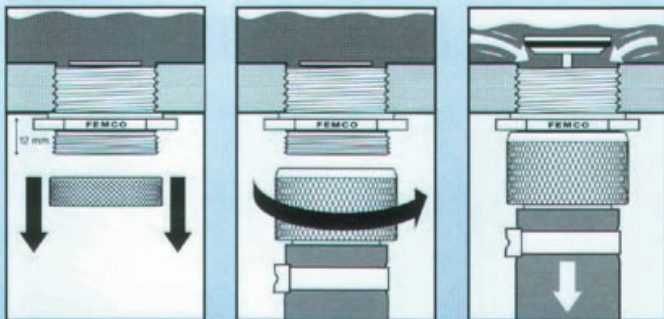

- For equipment with limited space or when ground clearance may be a problem, **FEMCO COMPACT SYSTEM** provides a solution. Simply replace the factory fitted plug. No special tools needed.
- Remove the dustcap, which keeps the threads clean.
- Thread the drainer onto the drain plug to activate the system.
- Hot oil drains quickly and safely by **GRAVITY OR SUCTION**.
- Remove the drainer, replace the dustcap.
- Full range of sizes and thread patterns: UNF, UNC, UNS, BSW, Metric, BSP, NPT etc. Custom sizes available.



Femco provides
NO-SPILL SOLUTIONS

for fast, clean, safe
hot oil draining

Femco

Drainer options and accessoires

*1: STANDARD

*2: COMPACT



Hex Dustcap
Optional
*1-4



Aluminum Extender
Drains through oil pan guards or accousite panels
*1-2-4



Angle Drainer
Supplied with 10" drain hose. Longer lengths available.
*1-2-3-4



Oil Sampler
Provides controlled flow for convenient sampling.
*1-2-3-4



Dustcap Chain
Optional. Prevent mislaid dustcap during oil change.
*1-3-4



Straight Drainer
Supplied with 10" drain hose. Longer lengths available.
*1-2-3-4



Custom Elbow
Solves many serious access problems.
*1-2-3-4



Magnet
Optional
*1-2-3-4



Femco products are patented or patent pending.
Femco Draintechology NL has been approved by Lloyd's: ISO-9001

Femco[®]
DRAINTECHNOLOGY



NO-SPILL
Drain
Systems



Standard
Compact

Copyright Femco Draintechology / environmental